


## Architura 1400 Series Row Mounting Installation Instructions

- Row Mounting available with Swivel, Sliding Brackets, Hub Brackets, Permaposts or Extended Arms.
- Mounted fixtures include patented tool-less, push-fit wire through connection system. Hubs offer fixture rotation during installation, solving the problem of aiming connected rows.
- 18" weatherproof cord exits 3" from the back left end of fixtures with the lens in the upright position. When fixtures are inverted aiming down, the cord will be on the right.
- Rows are calculated with standard fixture dimensions and will leave a 1/2" gap between each fixture. Add an additional 3/4" on each end if using hub brackets. For exact row lengths, request a custom run and we will specify the exact overall run length.


### ROW MOUNTING: SHOWN AS UPLIGHT

- Luminaires DO NOT use silicone plugs!

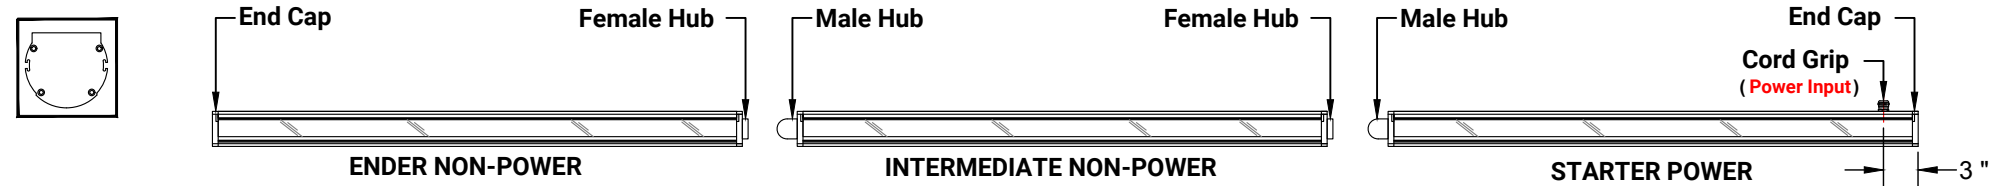


### ROW MOUNTING: SHOWN AS DOWNLIGHT


- Luminaires MUST use silicone plugs in all (6) locations!

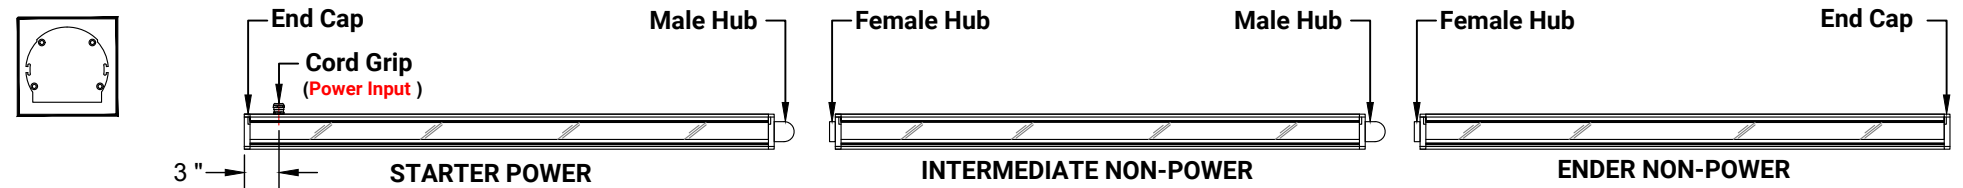


STARTER/ENDER END CAP

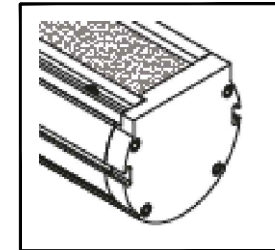

MALE HUB

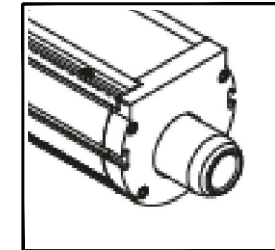


FEMALE HUB

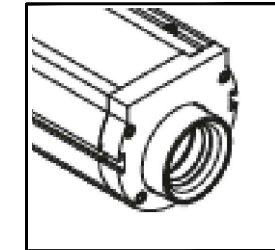


### INSTALLATION INSTRUCTIONS


1. CONNECT FIXTURES TOGETHER WITH THE IP67 MALE AND FEMALE CONNECTORS.

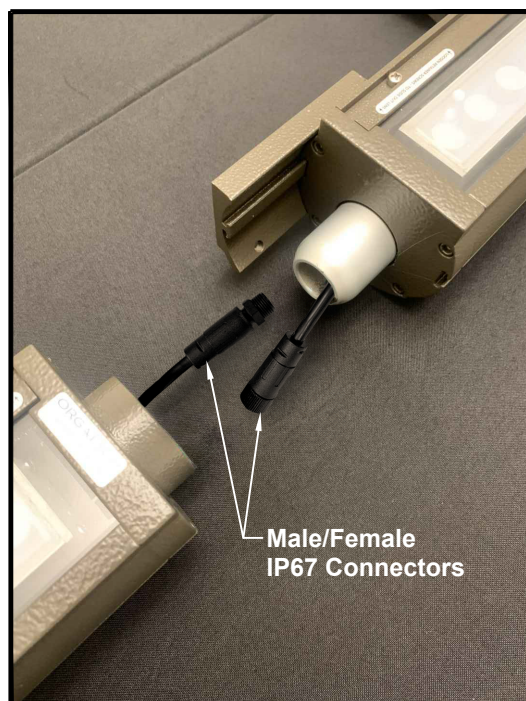

2. IF USING A LOCKING BRACKET, MAKE SURE TO SLIDE INTO CHANNEL 1.25" AND TIGHTEN SCREW.

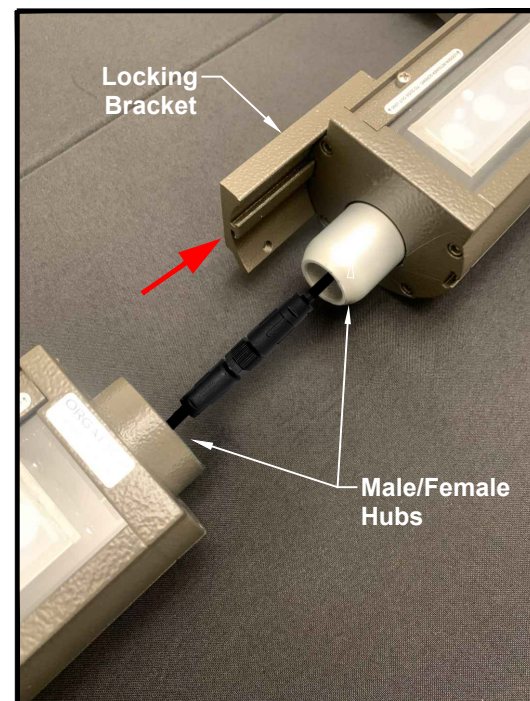


3. CONNECT FIXTURES TOGETHER BY SLIDING THE MALE HUB INTO THE FEMALE HUB (1/2" SPACING BETWEEN FIXTURES).

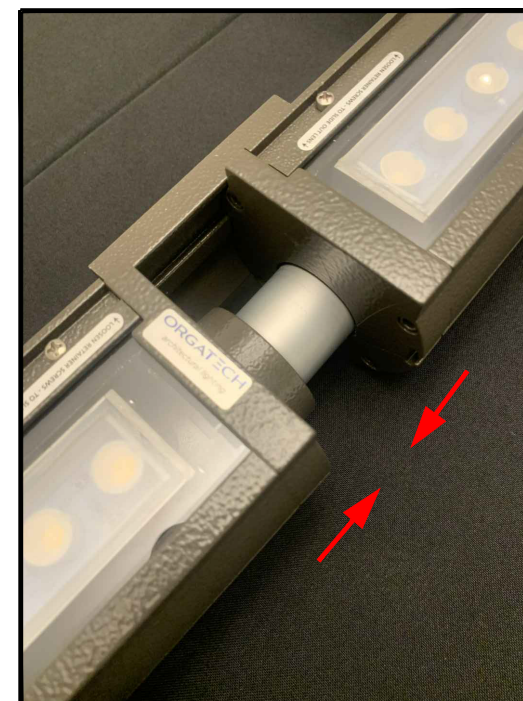

4. TIGHTEN MOUNTS IN PLACE. FIXTURES ARE READY TO BE TURNED ON.

5. IF USING A LOCKING BRACKET, SECURELY FASTEN THE LAST SCREW.

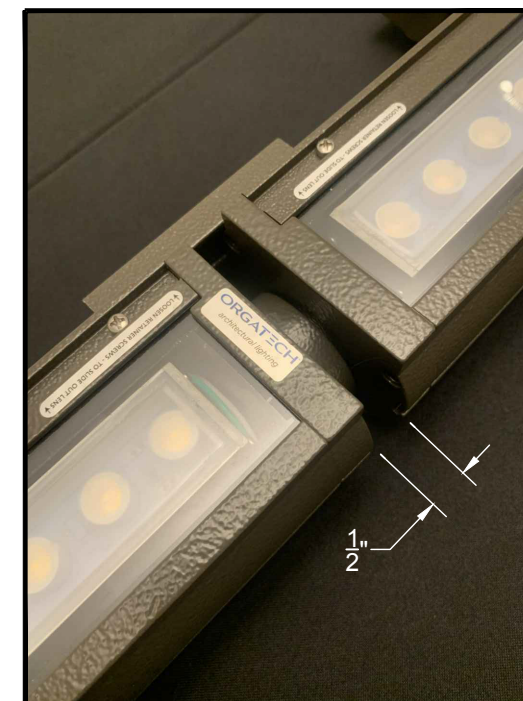

#### OPTIONAL LOCKING BRACKET:

- SECURES FIXTURES AT CONNECTING POINTS
- 3" LONG, SLIDES INTO THE CHANNEL AND SECURES WITH (2) SCREWS AT THE BASE

