


# Streamline 7100

## Indoor Linear LED

24V DC | 120-277VAC

ORGATECH

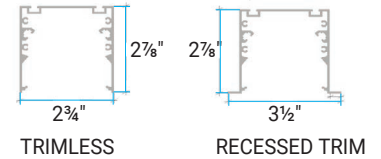

Project
Date



### DESCRIPTION

The Streamline Series fixture is an interior linear 2 3/4" wide fixture designed to produce direct and indirect lighting in a stylish package. Designed to be pendant mounted, surface mounted or recessed. Available in 2', 3', 4', 6', and 8' lengths. Two smaller sizes 1", and 1 3/4" can be suspended with adjustable cordless Low Voltage cable suspension and remote 24V power supply to create a free floating appearance. Color temperature, wattage, voltage, driver, optics, mounting options and finish are all selectable to customize the fixture to your specific application.

### FEATURES

<b>Construction</b>	Powder Coated Aluminum Fixtures. Polycarbonate Lenses.
<b>Length (nom.)</b>	2ft, 3ft, 4ft, 8ft
<b>White CCT</b>	2700K, 3000K, 4000K, 5000K, 6500K
<b>Dimming</b>	Non-dimming, 0-10V Dimming, TRI (Forward Phase), ELV (Reverse Phase)
<b>Mounting</b>	Suspended Cable, Surface Mount, Recessed, Wall Mount
<b>Finish</b>	Powder Coated Silver, Black, Bronze or White.

### PERFORMANCE

<b>Electrical</b>	24V DC, 120-277VAC. 0-10V / 10% Dimming and Emergency Battery Pack; specify voltage.
<b>LED Wattage</b>	LS 3W/ft (600lm/ft) / LH 4.6W/ft (920lm/ft) / LEH 5.8W/ft (1160lm/ft)
<b>Max Run</b>	33ft
<b>Warranty</b>	5 yr / 50,000 hour Limited Warranty
<b>CRI</b>	80+
<b>Certifications</b>	UL Listed

LS 3W/ft	Delivered Output	Watts
2ft	1200lm	6w
3ft	1800lm	9w
4ft	2400lm	12w
8ft	4800lm	24w

LH 4.6W/ft	Delivered Output	Watts
2ft	1840lm	9.2w
3ft	2760lm	13.8w
4ft	3680lm	18.4w
8ft	7360lm	36.8w

LEH 5.8W/ft	Delivered Output	Watts
2ft	2320lm	11.6w
3ft	3480lm	17.4w
4ft	4640lm	23.2w
8ft	9280lm	46.4w

### ORDERING GUIDE Make selections by filling out the top row or highlighting options.


7100									
SERIES	LENGTH	OUTPUT	CCT	VOLTAGE	CONTROL	OPTICS	MOUNTING	FINISH	OPTIONS
7100	1 1'nom 2 2'nom 3 3'nom 4 4'nom 8 8'nom	LS STANDARD LH HIGH LEH EXTRA HIGH	27 2700K 30 3000K 40 4000K 50 5000K 65 6500K	24V 24V U 120-277V	ND NON DIMMING D1 0-10V DIMMING TRI FORWARD PHASE ELV REVERSE PHASE	120 120°	Sx SUSPENDED CABLE SM SURFACE MOUNT R RECESSED WM WALL MOUNT C CUSTOM	SO SILVER BL BLACK BZ BRONZE WH WHITE CU CUSTOM	E EMERGENCY B BLADE LOUVER M MARINE GRADE FINISH N NONE

Specifications sheets are subject to change without notification.

## MOUNTING OPTIONS


### SUSPENDED CABLE

Provides a pendant mount with a low voltage aircraft cable available at your requested length.

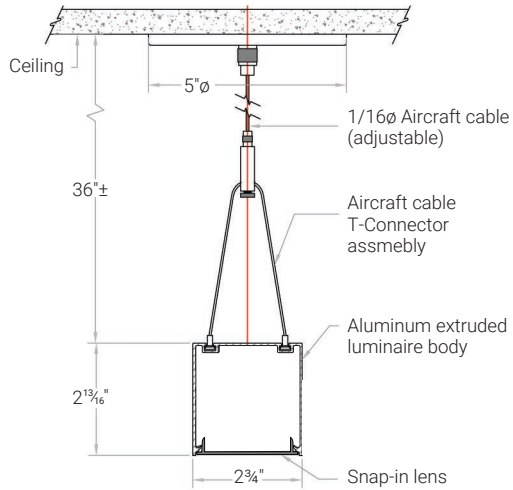


### RECESSED

Offers a trim for a simple and clean installation.

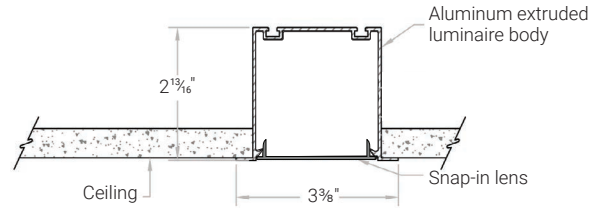

### SURFACE MOUNT

Screws directly onto a surface via the bottom end of the fixture.

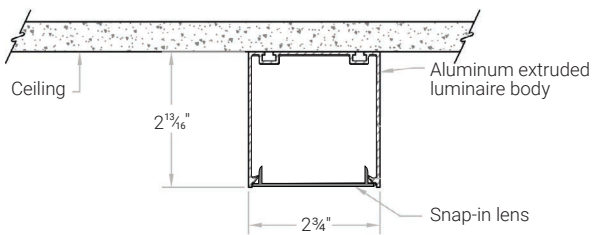

### WALL MOUNT

Screws onto a wall using a side bracket.

