


# Gulfstream 2® RGB

## Inground Wallwash

120-277V AC | IP68/IK10

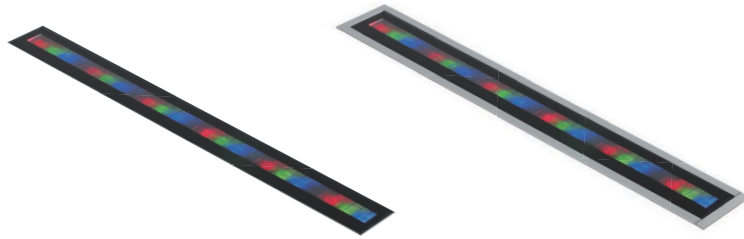

Outdoor buriable IP68, very high output luminaire with glare control and secondary lenses for asymmetric throw. Gulfstream 2® RGB is available with trim or as a trimless model with a seamless tempered glass edge, exposing only a thin border of the inground mounting housing. Stand alone or continuous housings with covers between fixtures which simplify installation by providing a thru-wiring option. Options include internal louvers for glare control and non-slip lens treatments. Gulfstream 2® RGB is also available with white LEDs and the option of line voltage options.

### Technical Specifications

Length (nom)	1ft	2ft	3ft	4ft
<b>Voltage</b>	120-277V AC			
<b>Wattage</b>	19W	32.5W	48W	63.5W
<b>Lumens</b>	530lm	1060lm	1590lm	2120lm
<b>Dimensions (in) (LxWxH)</b>	<b>T1</b> 12.7"x3"x3.2"	24.5"x3"x3.2"	36.3"x3"x3.2"	48.1"x3"x3.2"
	<b>T2</b> 12.7"x3"x4.7"	24.5"x3"x4.7"	36.3"x3"x4.7"	48.1"x3"x4.7"
<b>Luminaire weight</b>	3.48 lbs.	5.20 lbs.	7.41 lbs.	10.05 lbs.
<b>Inground profile weight</b>	1.67 lbs.	3.35 lbs.	5.03 lbs.	6.61 lbs.
<b>CCT</b>	RGB			
<b>Color rendering index</b>	80+			
<b>LED lifetime</b>	LM80 ≤ 100,000h			
<b>Thru-Wiring (Max)</b>	120V - 145ft / 240V - 290ft			
<b>Control</b>	DMX with RDM / DMX/ DALI / 0-10(1-10V) / PWM DIMMING			
<b>Housing</b>	Extruded aluminum / Tempered glass cover			
<b>Finish</b>	Anodized dark gray / Liquid painted for black			
<b>Ingress</b>	IP68 / IK10			
<b>Certifications</b>	UL Listed, CE, ROHS			

## ORGATECH®


High Performance Luminaire

Superior Glare Control

Easy Installation

IP68 Protection

High level of ingressive protection for outdoor applications.

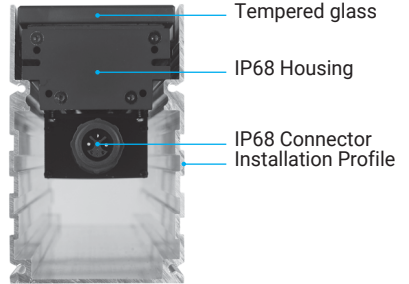


<b>Secondary Optic</b>	Wide Optic Asymmetric Optic
<b>Optics</b>	10° 20° 40° 10° x 60° 20° x 40°
<b>Operating Temperature</b>	min -4°F (-20°C) max 122°F (50°C)
<b>Storage Temperature</b>	min -22°F (-30°C) max 176°F (80°C)
<b>Trim</b>	Trimless Trim Trim-Left Trim-Center Trim-Right

**ORDERING GUIDE** Make selections by filling out the top row or highlighting options.


SERIES	TYPE	LENGTH (nom. ft)	OUTPUT	CCT	VOLTAGE	CONTROL	OPTICS	SECONDARY OPTIC	TRIM	ACCESSORY
GS2	T1	1	LS STANDARD	RGB	U 120-277V AC	DMX / RDM	10	ASY ASYMMETRIC LENS	TL TRIMLESS	NS NON-SLIP TREATMENT
GULFSTREAM2	T2	2				DMX	20	WID WIDE LENS	TM TRIM	
GS2P		3				DALI	40		TML TRIM-LEFT	MLV MICRO LOUVER
GULFSTREAM2 PIXEL		4				PMW	10x60 20x40	N NONE	TMC TRIM-CENTER	N NONE
									TMR TRIM-LEFT	

**Trimless**

**Trim**

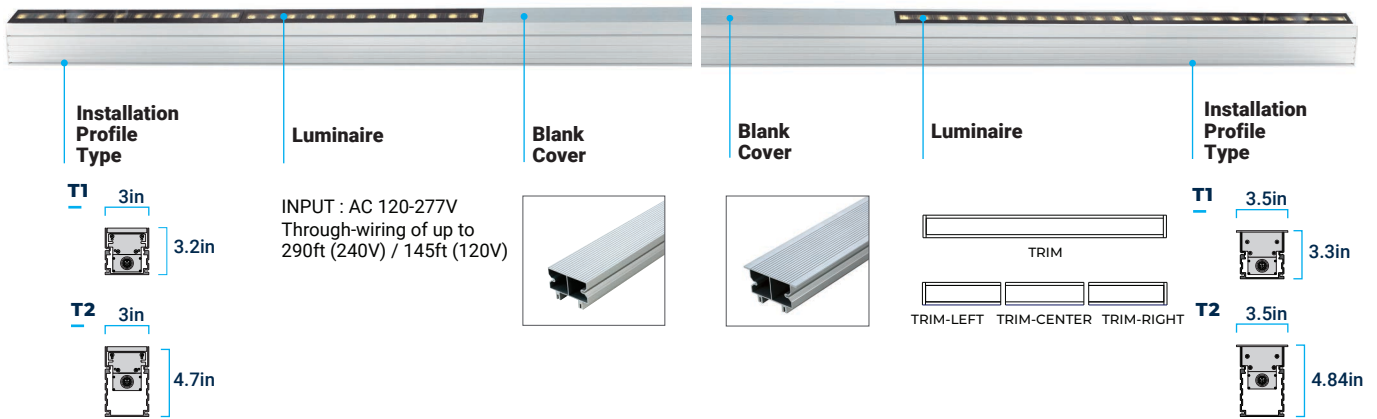


**DIMENSIONS**

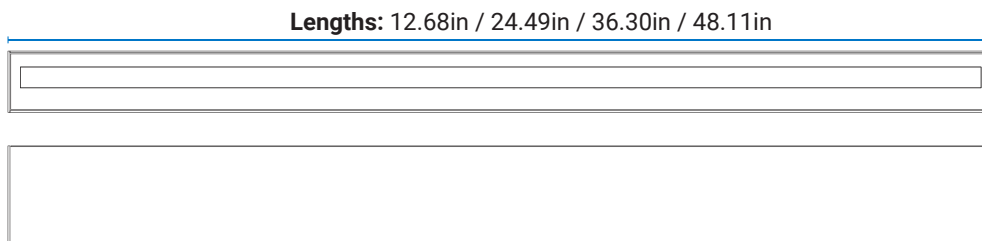

**ACCESSORY OPTIONS**


**Micro Louver Option**


Micro louvers are a built-in option and tilted to block out glare above 40 degrees from the vertical plane.

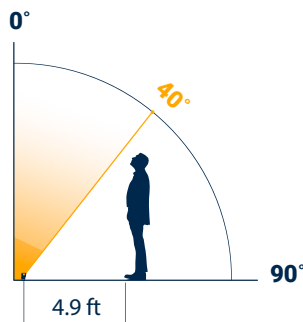

**Non-Slip Treatment Option**

Makes fixture slip-resistant.


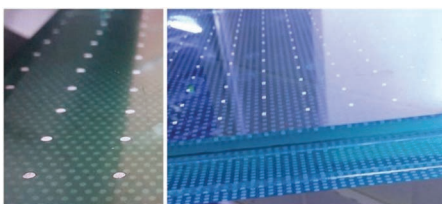


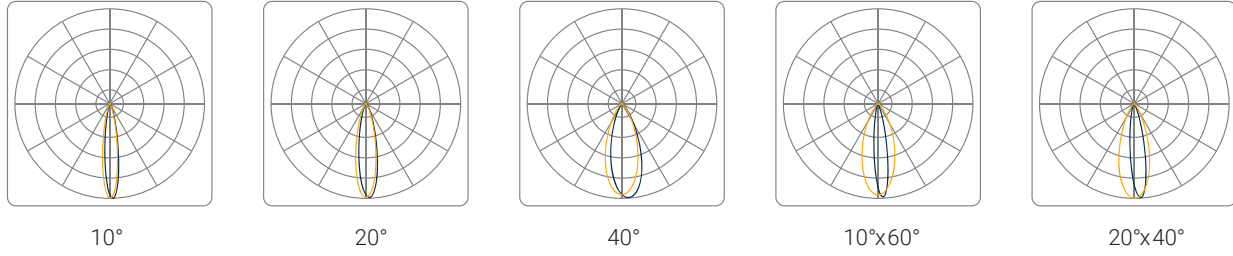

SECONDARY OPTICS


**Wide Optic**

Wide optic evens illumination at close range.

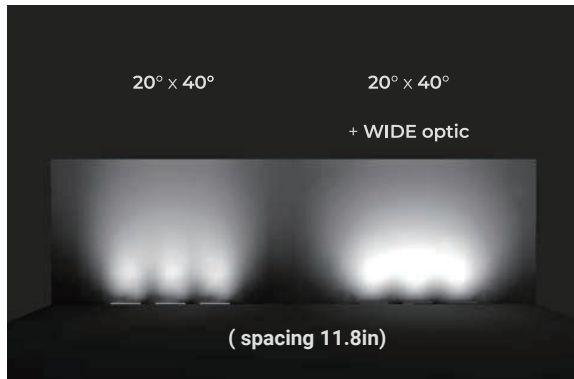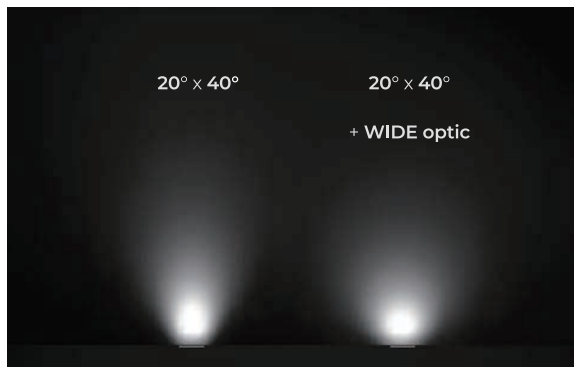


**Asymmetric Optic**


Asymmetric optic enables a 20 degree angle from the flat position.

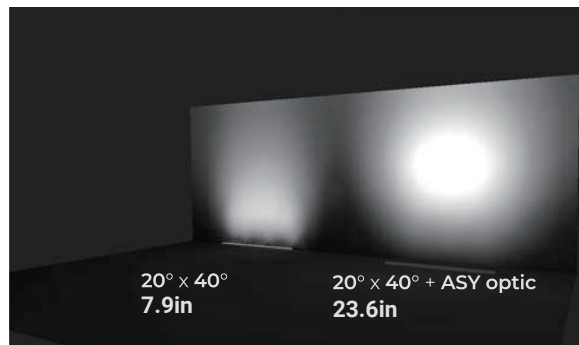

Starter Cable




Jumper Cable



End Cap



Trimless Blank Cover




Trim Blank Cover



TRIMLESS



TRIM



HOUSING TYPE 1

PART #	DESCRIPTION
GS2T1-1	Housing Type T1 / 1FT
GS2T1-2	Housing Type T1 / 2FT
GS2T1-3	Housing Type T1 / 3FT
GS2T1-4	Housing Type T1 / 4FT
GS2T1-6	Housing Type T1 / 6FT
GS2T1-9	Housing Type T1 / 9FT


IP67 QUICK CONNECT STARTER & JUMPER CABLES  
(Custom lengths available)

PART #	DESCRIPTION
GSSC5P-5	GS1-2 Starter Cable 5ft
GSSC5P-10	GS1-2 Starter Cable 10ft
GSSC5P-15	GS1-2 Starter Cable 15ft
GSSC5P-20	GS1-2 Starter Cable 20ft
GSJ5P-5	GS1-2 Jumper Cable 5ft
GSJ5P-10	GS1-2 Jumper Cable 10ft
GSJ5P-15	GS1-2 Jumper Cable 15ft
GSJ5P-20	GS1-2 Jumper Cable 20ft
GS2EC	GS2 End Cap


BLANK COVER

PART #	DESCRIPTION
GS2TLBC-3	Trimless Blank Cover / 3FT
GS2TLBC-6	Trimless Blank Cover / 6FT
GS2TLBC-9	Trimless Blank Cover / 9FT
GS2TMBC-3	Trim Blank Cover / 3FT
GS2TMBC-6	Trim Blank Cover / 6FT
GS2TMBC-9	Trim Blank Cover / 9FT

TRIMLESS




TRIM



HOUSING TYPE 2

PART #	DESCRIPTION
GS2T2-1	Housing Type T2 / 1FT
GS2T2-2	Housing Type T2 / 2FT
GS2T2-3	Housing Type T2 / 3FT
GS2T2-4	Housing Type T2 / 4FT
GS2T2-6	Housing Type T2 / 6FT
GS2T2-9	Housing Type T2 / 9FT

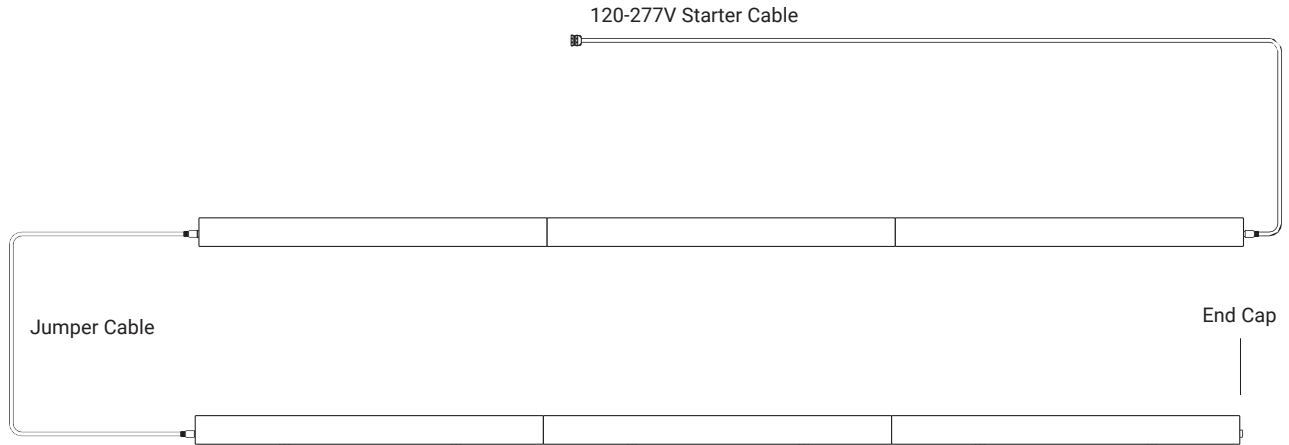

**ELECTRICAL DETAILS**

RGB/RGBW | 120-277V AC

BROWN	BLUE	GREEN	RED	BLACK
ACL +	ACN -	GROUND	DMX +	DMX -

