

# Ziro 1500 Cathedral Series

## Indirect or Wallwash

120-277VAC



ORGATECH

Project

Date



Fixture	Available Length	Watts	Lumen Output
L30	14" & 18"	30W	5,400lm
L40	14" & 18"	40W	7,000lm
L50	14" & 18"	50W	8,500lm
L60	14" & 18"	60W	9,780lm
L80	18" & 24"	80W	14,000lm
L90	18" & 24"	90W	15,500lm
L100	18" & 24"	100W	17,000lm
L120	18" & 24"	120W	19,560lm
L150	18" & 24"	150W	25,500lm
L180	18" & 24"	180W	29,340lm
L200	18" & 24"	200W	34,000lm
L240	24"	240W	39,120lm
L360	36"	360W	58,680lm
L420	36"	420W	68,460lm
L480	36"	480W	78,240lm
Cu		CUSTOM	

### DESCRIPTION

The Ziro produces powerful indirect LED illumination using the latest high efficiency LEDs to their true advantage. Energy efficiency combined with the well-known visual performance benefits of indirect lighting eliminates the hazards and discomfort of LED glare. At 180lm/W, the Ziro is 60% more efficient than our previous models. Our cool running fixtures with integral drivers compliment architectural elements while making their own discrete statement.

### FEATURES

Construction	Extruded Aluminum w/ Aluminum Endcaps & Stainless Steel Hardware.
Length (nom.)	14" / 18" / 24" / 36"
Weight	14" - 10lbs / 18" - 12lbs / 24" - 15lbs / 36" - 25lbs
CCT	3000K, 3500K, 4000K, 5000K
Dimming	Non-dimming, 0-10V Dimming
Optics	Type III Lens (Forward Throw)
Mounting	Swivel Mount, Yoke Mount, Pendant-Single, Double
Finish	Powder Coated White, Black, Bronze, Silver, Custom, Marine Grade

### PERFORMANCE

Electrical	120-277V AC. Integral Drivers, Constant Current
LED Output	14" & 18" 30W-60W   18" & 24" 80W-200W   24" 240W   36" 360W-480W
Environment	Wet Location - IP67. Operating Temperature - 40°F to 122°F
Warranty	5 yr / 50,000 hour limited warranty
CRI	80+
Certifications	ETL / UL Listed 1598 / BAA and BABA Options Available

**ORDERING GUIDE** Make selections by filling out the top row or highlighting options.


1500	SERIES	LENGTH	OUTPUT	CCT	VOLTAGE	CONTROL	MOUNTING	FINISH	ACCESSORY	CERTIFICATIONS
1500	1500	14 14"nom 18 18"nom 24 24"nom	L30 30W L40 40W L50 50W L60 60W L80 80W L90 90W L100 100W L120 120W L150 150W L180 180W L200 200W L240 240W L360 360W L420 420W L480 480W Cu CUSTOM	30 3000K 35 3500K 40 4000K 50 5000K	U 120-277V	ND NON DIMMING D1 0-10V DIMMING	SW SWIVEL MOUNT YK YOKE MOUNT PS36 SINGLE PENDANT* PD36 DOUBLE PENDANT*	WH WHITE BL BLACK BZ BRONZE SO SILVER CU CUSTOM	G GLARE SHIELD M MARINE GRADE FINISH E EMERGENCY DRIVER Ax EXTENDED ARM (x=length)** 2 NATATORIUM N NONE	BAA BAA BABA BABA N NONE

Specifications sheets are subject to change without notification.

\*120" Max Pendant length

\*\*x=36" max

## FIXTURE SIZES

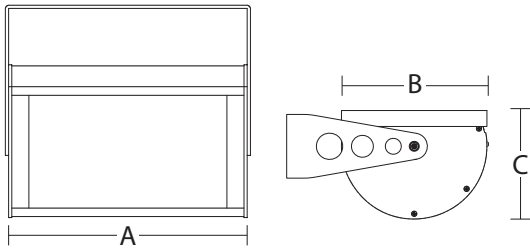

FIXTURE	A	B	C	WT.
14"	14 3/8"	8 1/4"	6 3/4"	10 lbs
18"	18 3/8"	8 1/4"	6 3/4"	12lbs
24"	24 3/8"	8 1/4"	6 3/4"	15 lbs
36"	36 3/8"	8 1/4"	6 3/4"	25 lbs




### FINISHES (POWDER COATED)



## MOUNTING INSTALLATION




### SWIVEL MOUNT

A heavy duty adjustable swivel mount with mounting plate. 24" fixtures requires (2) swivel mounts.

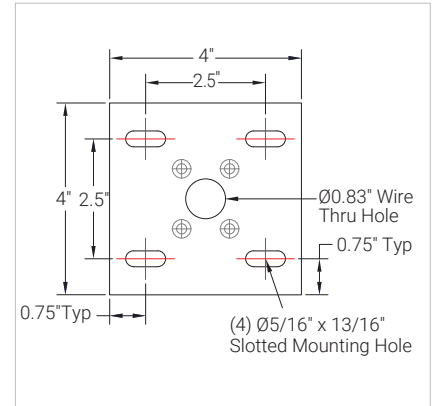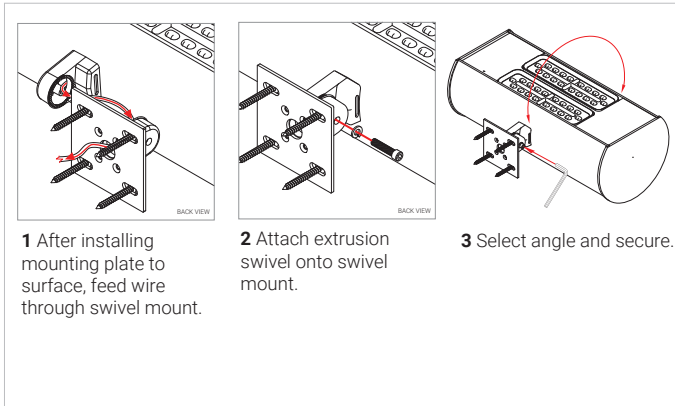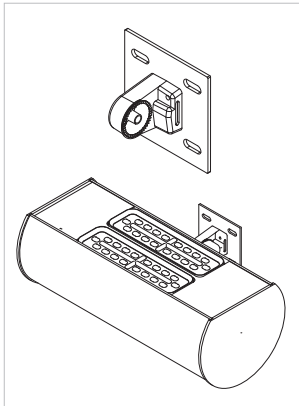

### YOKE MOUNT


Implements rotary mechanics to enable directional adjustments simplicity. The symmetrical structure provides a clean and uniform structure. Mounts to structure cover via (2) 1/4" screws.

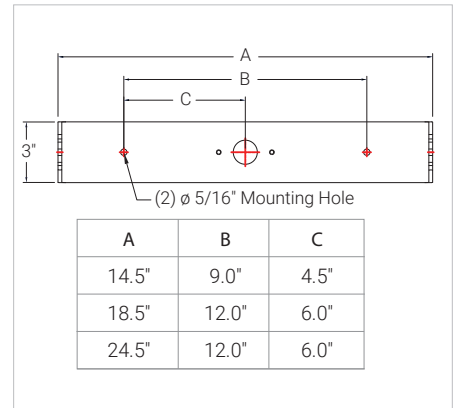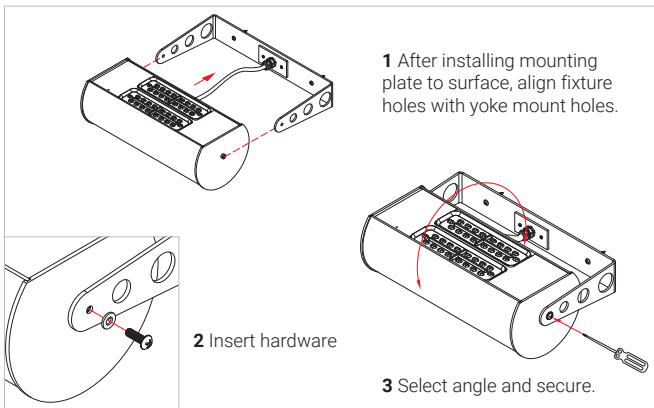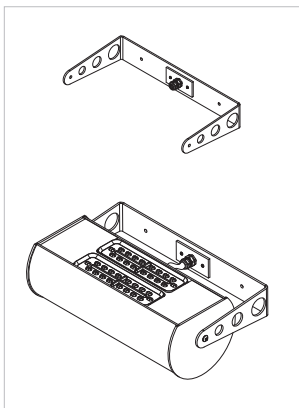

## MOUNTING INSTALLATION


### SINGLE FIXTURE, PENDANT MOUNT

With 36" standard stem.

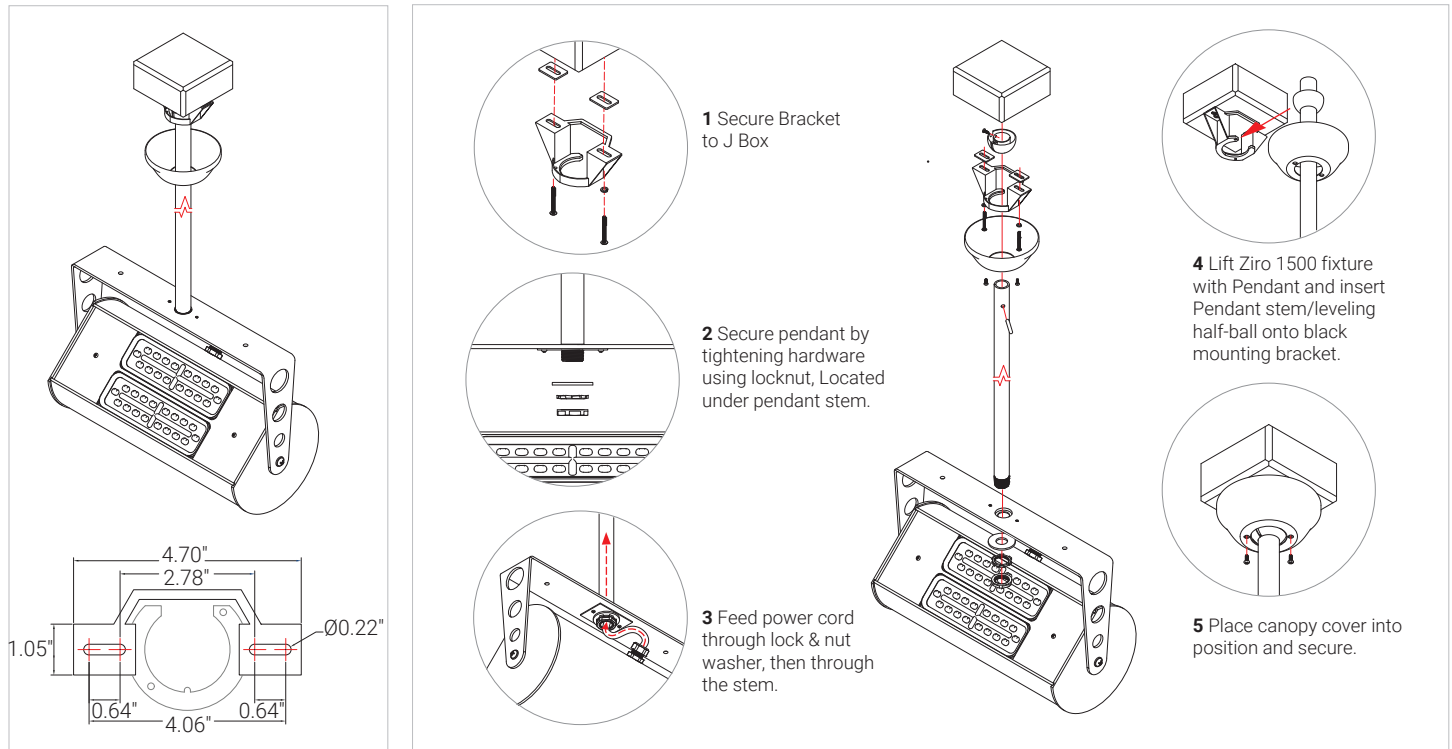

### DOUBLE FIXTURE, PENDANT MOUNT

With 36" standard stems.



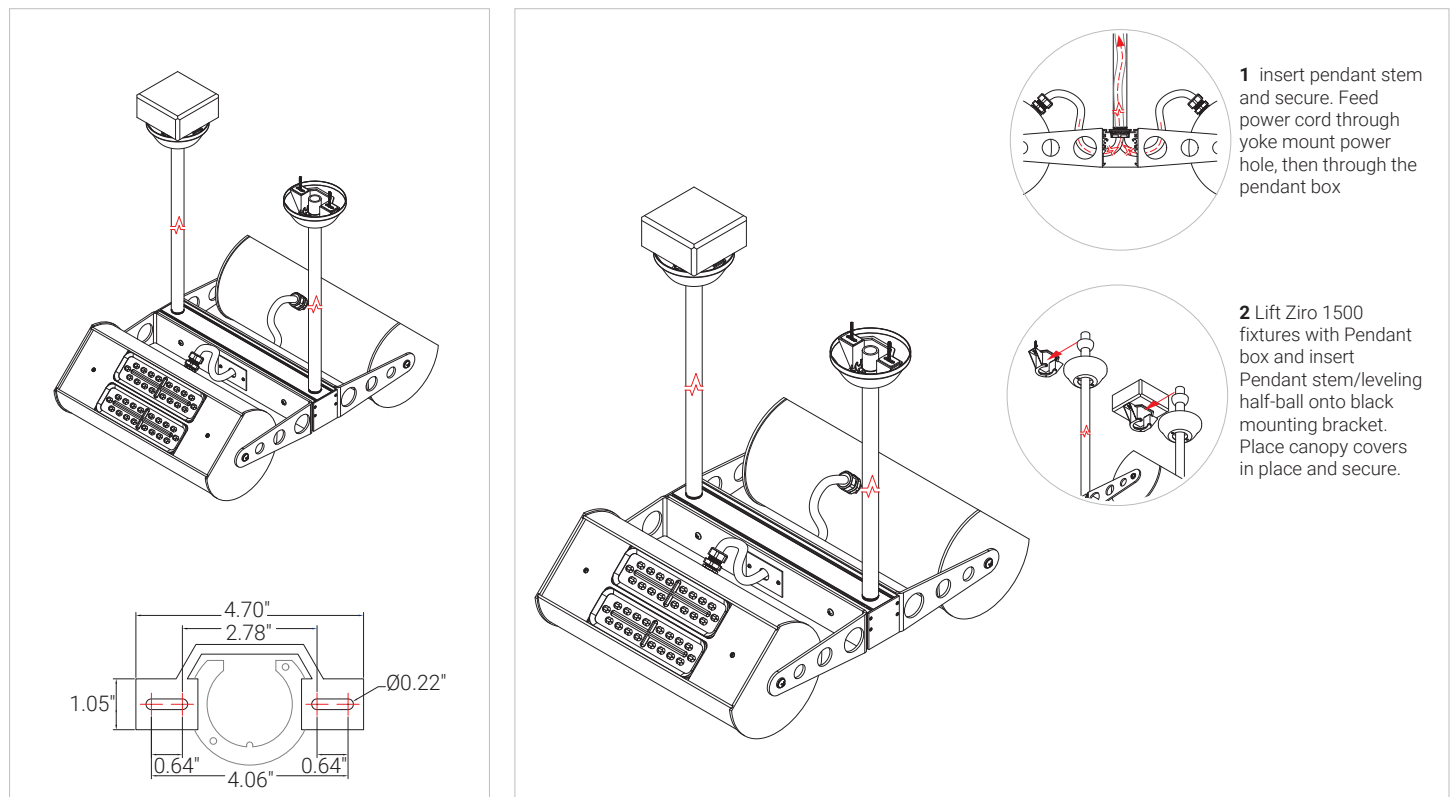


Specifications sheets are subject to change without notification.

## ACCESSORIES




### GLARE SHIELD

Minimizes a direct glare, while maintaining the LED output.

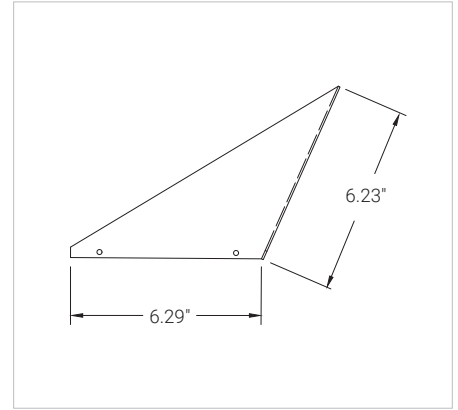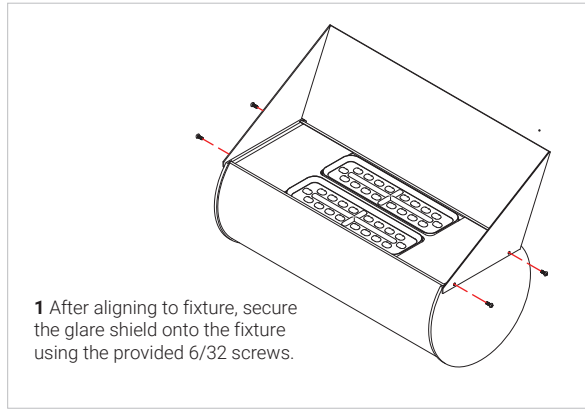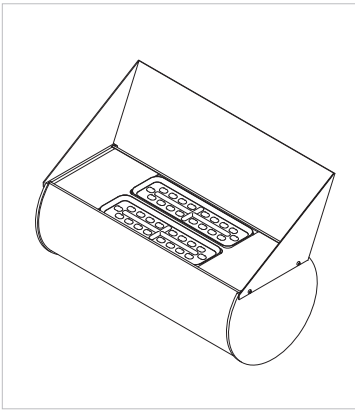


### EXTENDED ARM

With swivel mount, extended arm is available in 4"-36" lengths. Power cords can be routed through arms, exiting close to the wall to connect to an adjacent j-box or other power outlet, providing a tidy installation. 24" fixtures requires (2) swivel mounts.

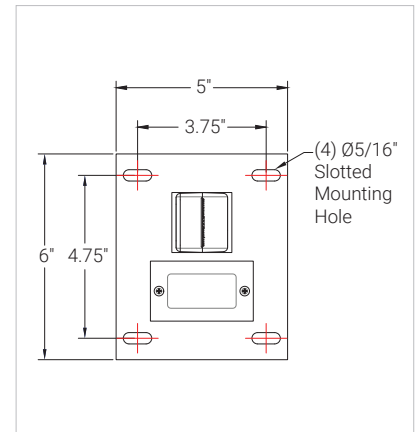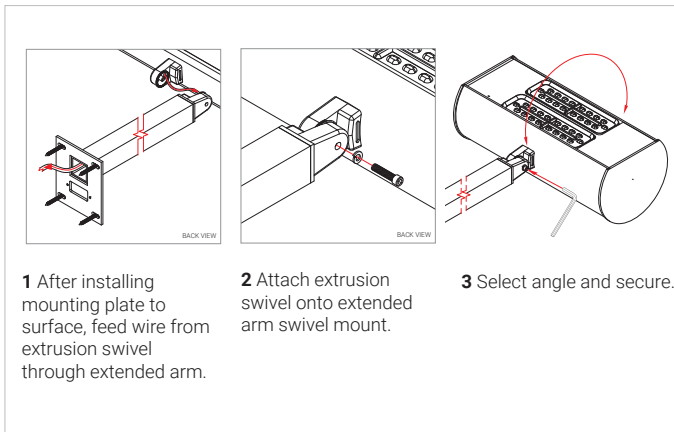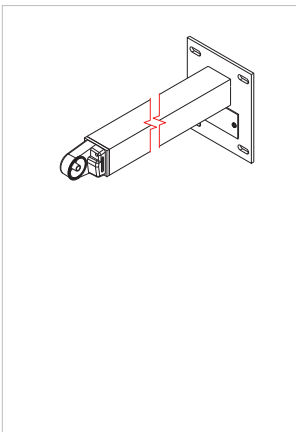

## ELECTRICAL DETAILS

### Non-Dimming | 3 Wire | 120-277V

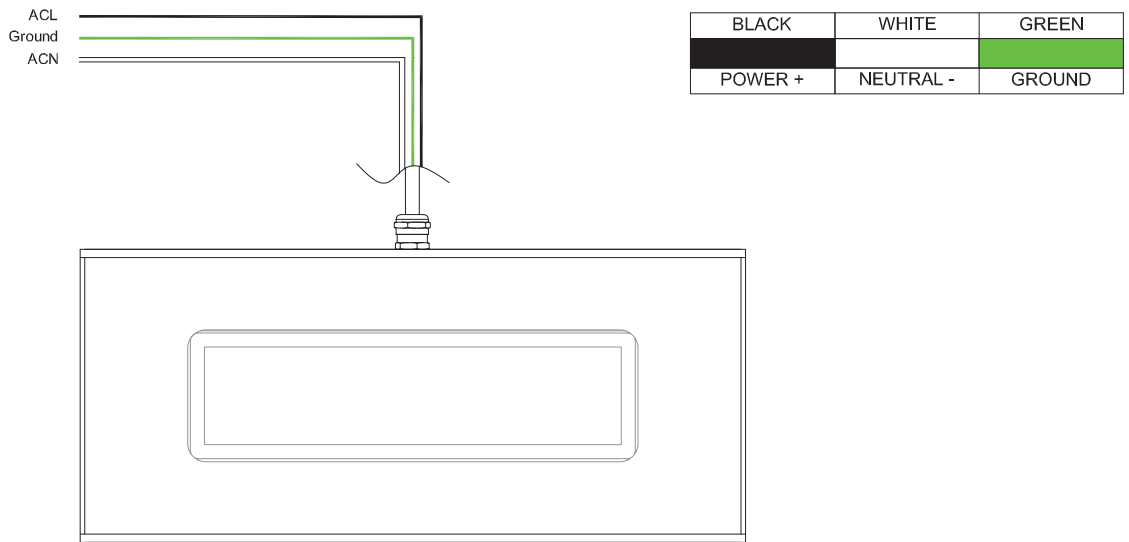

### 0-10V Dimming | 5 Wire | 120-277V

