


Gulfstream 2[®] Tunable White

Inground Wallwash

27K - 65K | 120-277V AC | IP68/IK10

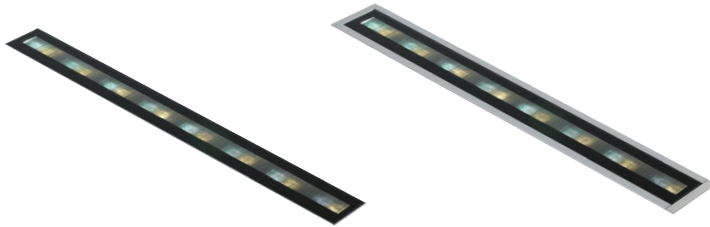

Outdoor buriable IP68, very high output luminaire with glare control and secondary lenses for asymmetric throw. Gulfstream 2[®] TW is available with trim or as a trimless model with a seamless tempered glass edge, exposing only a thin border of the inground mounting housing. Stand alone or continuous housings with covers between fixtures which simplify installation by providing a thru-wiring option. Options include internal louvers for glare control and non-slip lens treatments. Gulfstream 2[®] TW is also available with white LEDs and the option of line voltage options.

Technical Specifications

Length (nom)	1ft	2ft	3ft	4ft
Voltage	120-277V AC			
Wattage	19W	33.5W	48W	65W
Lumens	1180lm	2360lm	3540lm	4720lm
Dimensions (LxWxH)	T1 12.7"x3"x3.2"	24.5"x3"x3.2"	36.3"x3"x3.2"	48.1"x3"x3.2"
	T2 12.7"x3"x4.7"	24.5"x3"x4.7"	36.3"x3"x4.7"	48.1"x3"x4.7"
Luminaire weight	3.48 lbs.	5.20 lbs.	7.41 lbs.	10.05 lbs.
Inground profile weight	1.67 lbs.	3.35 lbs.	5.03 lbs.	6.61 lbs.
CCT	2700K - 6500K			
Color rendering index	80+ (white)			
LED lifetime	LM80 ≤ 100,000h			
Thru-Wiring (Max)	120V - 145ft / 240V - 290ft			
Control	DMX with RDM / DMX/ DALI / 0-10(1-10V) / PWM DIMMING			
Housing	Extruded aluminum / Tempered glass cover			
Finish	Anodized dark gray / Liquid painted for black			
Ingress	IP68 / IK10			

ORGATECH[®]



High Performance Luminaire

Superior Glare Control

Easy Installation

IP68 Protection


High level of ingressive protection for outdoor applications.

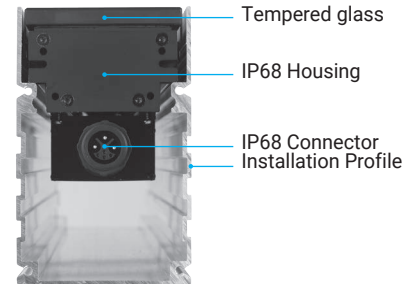


Secondary Optic	Wide Optic
	Asymmetric Optic
Beam Angle	10°
	20°
	40°
	10° x 60°
	20° x 40°
Luminaire efficacy	Up to 81lm/W
Operating Temperature	min -20°C, max 50°C
Storage Temperature	min -30°C, max 80°C
Trim	Trimless
	Trim
	Trim-Left
	Trim-Center
	Trim-Right

Trimless


Trim

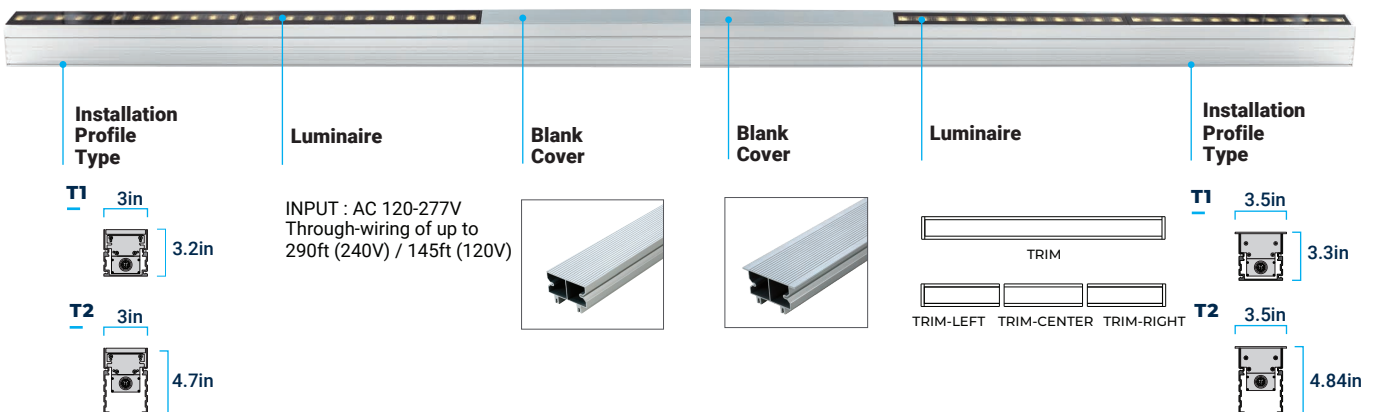

Lengths: 12.68in / 24.49in / 36.30in / 48.11in




Installation Profile Type

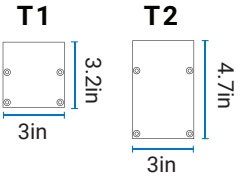

OPTIONS


Micro Louver Option


Micro louvers are a built-in option and tilted to block out glare above 40 degrees from the vertical plane.

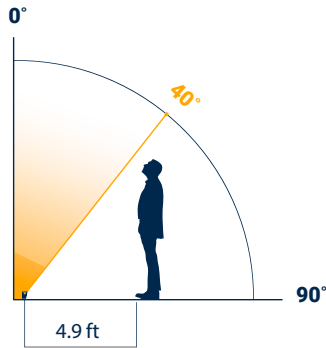

Non-Slip Treatment Option

Makes fixture slip-resistant.


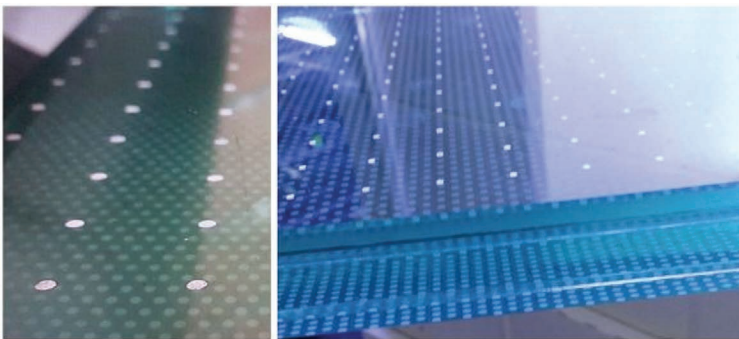


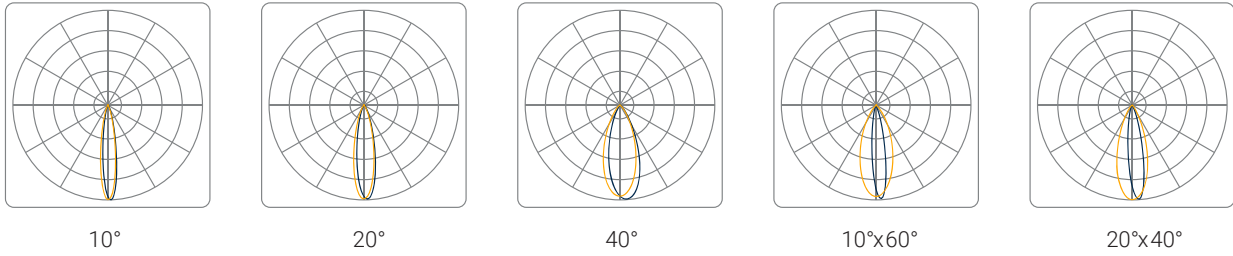

SECONDARY OPTICS


Wide Optic

Wide optic evens illumination at close range.

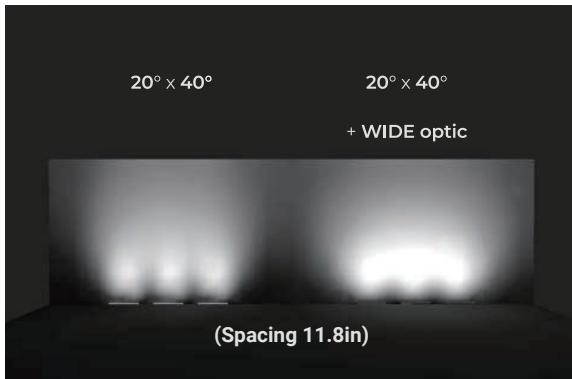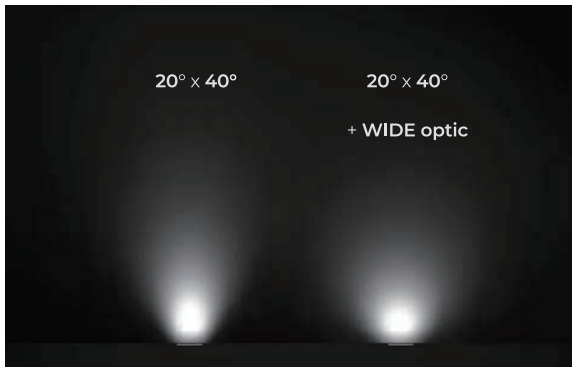


Asymmetric Optic


Asymmetric optic enables a 20 degree angle from the flat position.

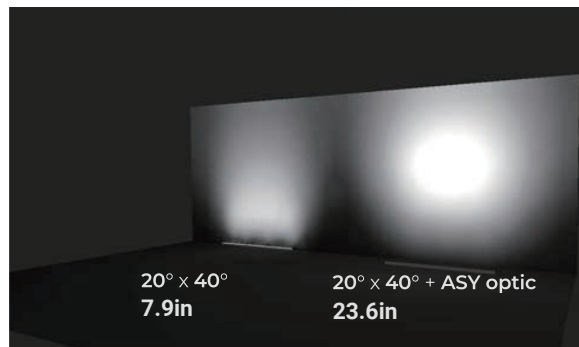

Starter Cable




Jumper Cable





End Cap



Trimless Blank Cover



Trim Blank Cover



HOUSING TYPE 1

PART #	DESCRIPTION
GS2T1-1	Housing Type T1 / 1FT
GS2T1-2	Housing Type T1 / 2FT
GS2T1-3	Housing Type T1 / 3FT
GS2T1-4	Housing Type T1 / 4FT
GS2T1-6	Housing Type T1 / 6FT
GS2T1-9	Housing Type T1 / 9FT


IP67 QUICK CONNECT STARTER & JUMPER CABLES

(Custom lengths available)

PART #	DESCRIPTION
GSSC5P-5	GS1-2 Starter Cable 5ft
GSSC5P-10	GS1-2 Starter Cable 10ft
GSSC5P-15	GS1-2 Starter Cable 15ft
GSSC5P-20	GS1-2 Starter Cable 20ft
GSJ5P-5	GS1-2 Jumper Cable 5ft
GSJ5P-10	GS1-2 Jumper Cable 10ft
GSJ5P-15	GS1-2 Jumper Cable 15ft
GSJ5P-20	GS1-2 Jumper Cable 20ft
GS2EC	GS2 End Cap

BLANK COVER


PART #	DESCRIPTION
GS2TLBC-3	Trimless Blank Cover / 3FT
GS2TLBC-6	Trimless Blank Cover / 6FT
GS2TLBC-9	Trimless Blank Cover / 9FT
GS2TMBC-3	Trim Blank Cover / 3FT
GS2TMBC-6	Trim Blank Cover / 6FT
GS2TMBC-9	Trim Blank Cover / 9FT



HOUSING TYPE 2

PART #	DESCRIPTION
GS2T2-1	Housing Type T2 / 1FT
GS2T2-2	Housing Type T2 / 2FT
GS2T2-3	Housing Type T2 / 3FT
GS2T2-4	Housing Type T2 / 4FT
GS2T2-6	Housing Type T2 / 6FT
GS2T2-9	Housing Type T2 / 9FT



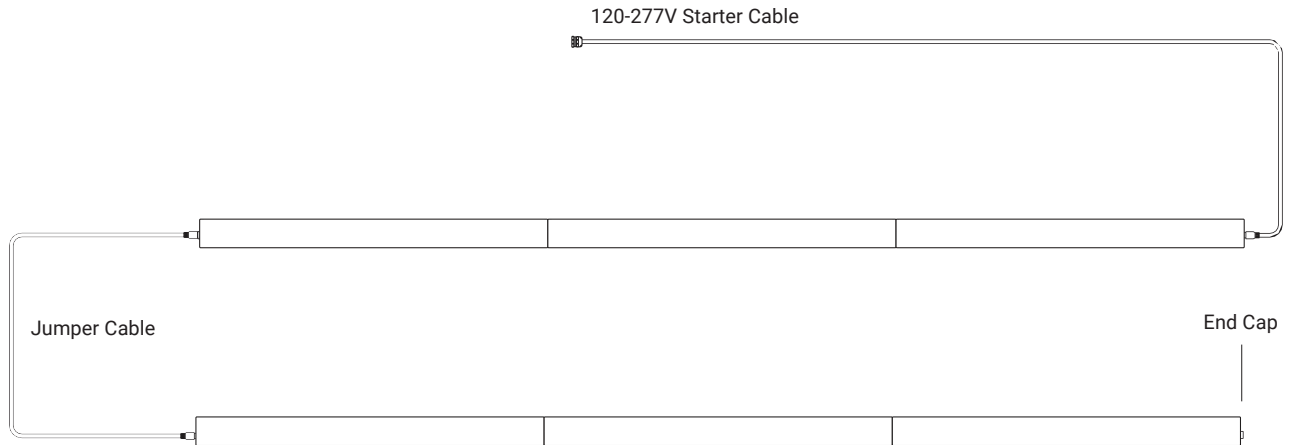

ORDERING GUIDE

Make selections by filling out the top row or highlighting options.

GULFSTREAM 2 - TUNABLE WHITE

GS2										
SERIES	TYPE	LENGTH (nom. ft)	CCT	OUTPUT	VOLTAGE	CONTROL	BEAM ANGLE	SECONDARY OPTIC	TRIM	OPTIONS
GS2 GULFSTREAM2	T1 T2	1 2 3 4	TW	LS STANDARD	U 120-277V AC	DMX / RDM DMX DALI (0-10V) PMW	10 20 40 10x60 20x40	ASY ASYMMETRIC LENS WID WIDE LENS N NONE	TL TRIMLESS TM TRIM Row only ----- TML TRIM-LEFT TMC TRIM-CENTER TMR TRIM-LEFT	NS NON-SLIP TREATMENT MLV MICRO LOUVER N NONE

