


Gulfstream 2® RGBW

Inground Wallwash

120-277V AC | IP68/IK10

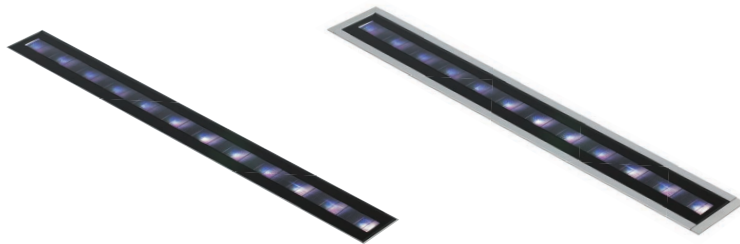

ORGATECH®

High Performance Luminaire

Superior Glare Control

Easy Installation

IP68 Protection


High level of ingress protection for outdoor applications.



Outdoor buriable IP68, very high output luminaire with glare control and secondary lenses for asymmetric throw. Gulfstream 2® RGBW is available with trim or as a trimless model with a seamless tempered glass edge, exposing only a thin border of the inground mounting housing. Stand alone or continuous housings with covers between fixtures which simplify installation by providing a thru-wiring option. Options include internal louvers for glare control and non-slip lens treatments. Gulfstream 2® RGBW is also available with white LEDs and the option of line voltage options.

Technical Specifications

Length (nom)	1ft	2ft	3ft	4ft
Voltage	120-277V AC			
Wattage	19W	33.5W	48W	65W
Lumens	540lm	1080lm	1620lm	2160lm
Dimensions (in) (LxWxH)	T1 12.7"x3"x3.2"	24.5"x3"x3.2"	36.3"x3"x3.2"	48.1"x3"x3.2"
	T2 12.7"x3"x4.7"	24.5"x3"x4.7"	36.3"x3"x4.7"	48.1"x3"x4.7"
Luminaire weight	3.48 lbs.	5.20 lbs.	7.41 lbs.	10.05 lbs.
Inground profile weight	1.67 lbs.	3.35 lbs.	5.03 lbs.	6.61 lbs.
CCT	RGBW 4000K / RGBW 6000K			
Color rendering index	80+			
LED lifetime	LM80 ≤ 100,000h			
Thru-Wiring (Max)	120V -145ft / 240V -290ft			
Control	DMX with RDM/DMX / DALI / 0-10(1-10V) / PWM DIMMING			
Housing	Extruded aluminum / Tempered glass cover			
Finish	Anodized dark gray / Liquid painted for black			
Ingress	IP68 / IK10			
Certifications	UL Listed, CE, ROHS			

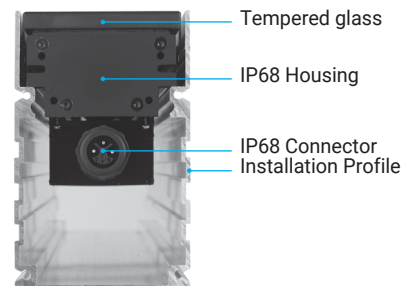


Secondary Optic	Wide Optic
	Asymmetric Optic
Beam Angle	40°
	20° x 40°
Operating Temperature	min -4°F (-20°C)
	max 122°F (50°C)
Storage Temperature	min -22°F (-30°C)
	max 176°F (80°C)
Trim	Trimless
	Trim
	Trim-Left
	Trim-Center
	Trim-Right

ORDERING GUIDE Make selections by filling out the top row or highlighting options.


GS2																
SERIES	TYPE	LENGTH (nom. ft)	OUTPUT	CCT	VOLTAGE	CONTROL	OPTICS	SECONDARY OPTIC	TRIM	ACCESSORY						
GS2 GULFSTREAM2	T1	1	LS STANDARD	RGBW40	U 120-277VAC	DMX / RDM	40	ASY ASYMMETRIC LENS	TL TRIMLESS	NS NON-SLIP TREATMENT						
	T2	2							TM TRIM							
GS2P GULFSTREAM2 PIXEL		3							RGBW60			DALI	20x40	WID WIDE LENS	Row only -----	MLV MICRO LOUVER
		4													N NONE	
								TMC TRIM-CENTER								
								TMR TRIM-LEFT								

Trimless

Trim

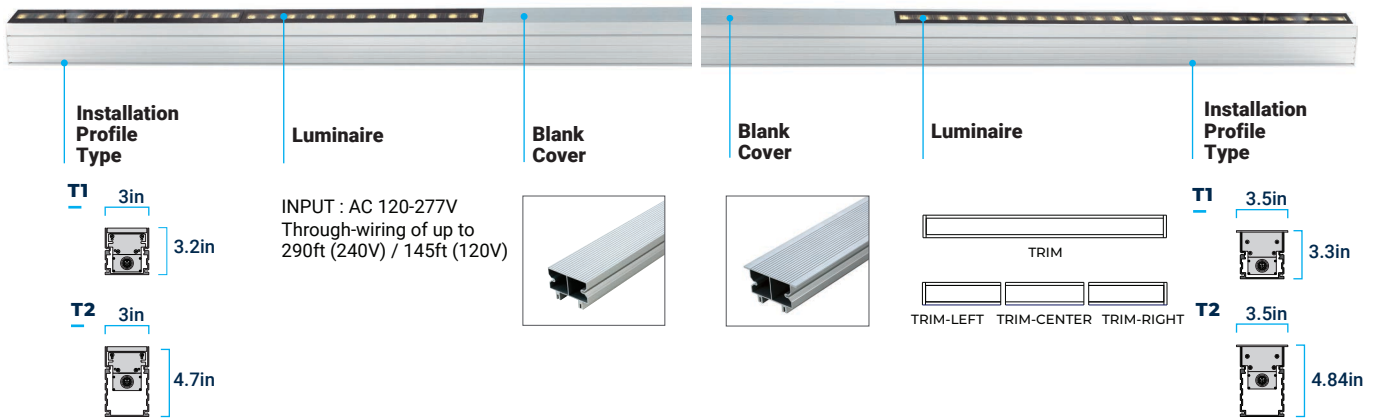


DIMENSIONS

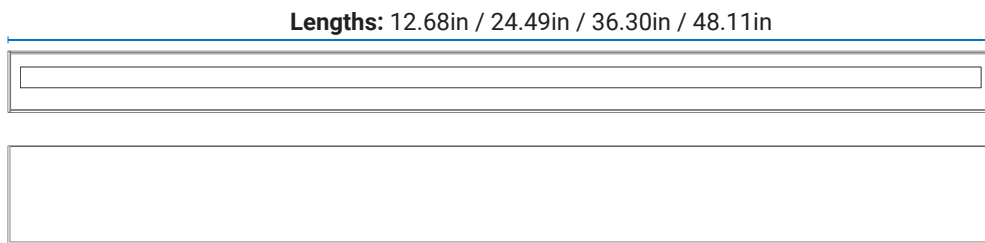

ACCESSORY OPTIONS


Micro Louver Option


Micro louvers are a built-in option and tilted to block out glare above 40 degrees from the verticle plane.

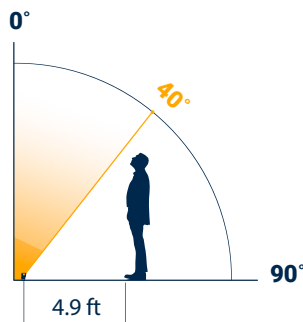

Non-Slip Treatment Option

Makes fixture slip-resistant.



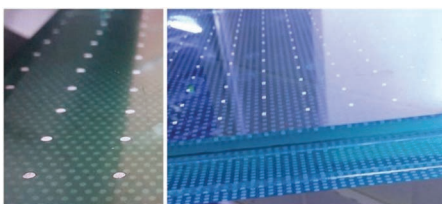


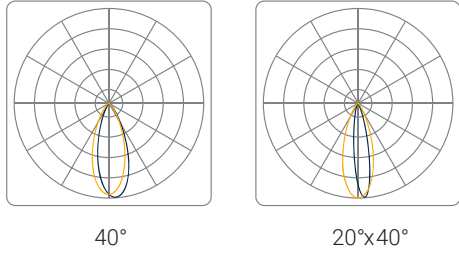

SECONDARY OPTICS


Wide Optic

Wide optic evens illumination at close range.

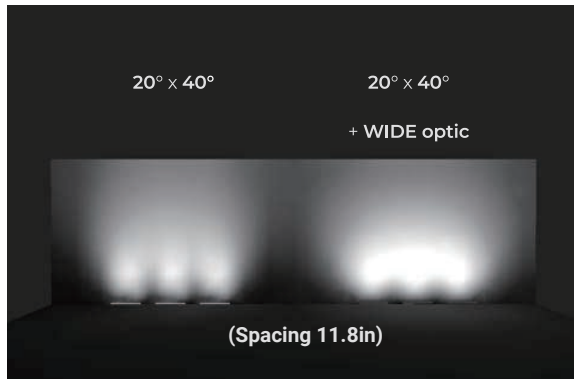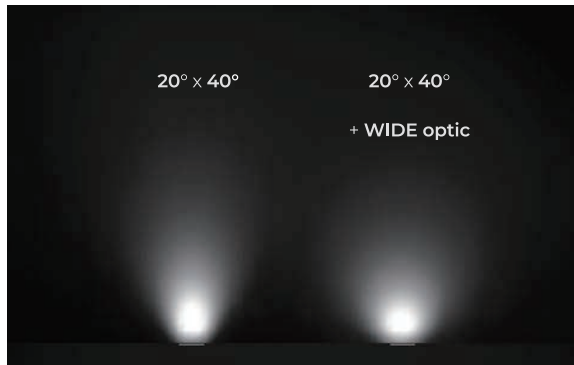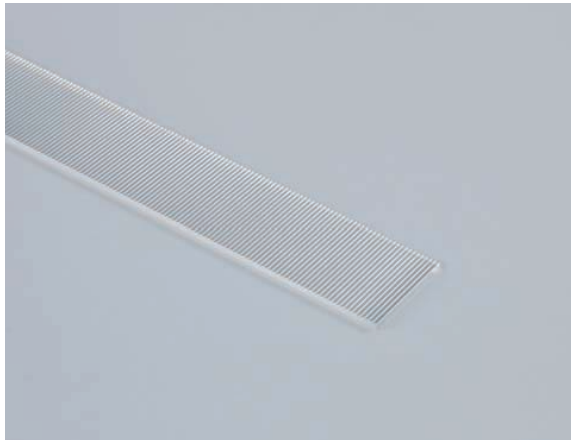


Asymmetric Optic


Asymmetric optic enables a 20 degree angle from the flat position.

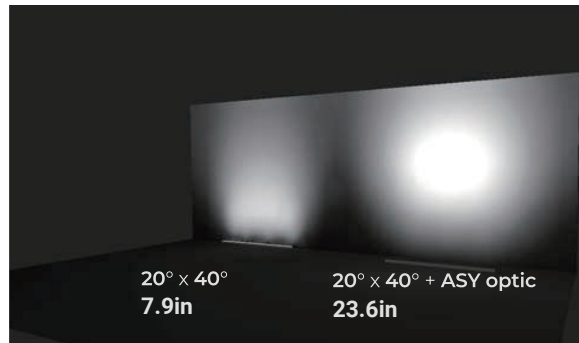

Starter Cable



Jumper Cable




End Cap



Trimless Blank Cover




Trim Blank Cover



TRIMLESS



TRIM




IP67 QUICK CONNECT STARTER & JUMPER CABLES
(Custom lengths available)

PART #	DESCRIPTION
GS5C5P-5	GS1-2 Starter Cable 5ft
GS5C5P-10	GS1-2 Starter Cable 10ft
GS5C5P-15	GS1-2 Starter Cable 15ft
GS5C5P-20	GS1-2 Starter Cable 20ft
GSJ5P-5	GS1-2 Jumper Cable 5ft
GSJ5P-10	GS1-2 Jumper Cable 10ft
GSJ5P-15	GS1-2 Jumper Cable 15ft
GSJ5P-20	GS1-2 Jumper Cable 20ft
GS2EC	GS2 End Cap


BLANK COVER

PART #	DESCRIPTION
GS2TLBC-3	Trimless Blank Cover / 3FT
GS2TLBC-6	Trimless Blank Cover / 6FT
GS2TLBC-9	Trimless Blank Cover / 9FT
GS2TMBC-3	Trim Blank Cover / 3FT
GS2TMBC-6	Trim Blank Cover / 6FT
GS2TMBC-9	Trim Blank Cover / 9FT

TRIMLESS



TRIM




HOUSING TYPE 1

PART #	DESCRIPTION
GS2T1-1	Housing Type T1 / 1FT
GS2T1-2	Housing Type T1 / 2FT
GS2T1-3	Housing Type T1 / 3FT
GS2T1-4	Housing Type T1 / 4FT
GS2T1-6	Housing Type T1 / 6FT
GS2T1-9	Housing Type T1 / 9FT

HOUSING TYPE 2

PART #	DESCRIPTION
GS2T2-1	Housing Type T2 / 1FT
GS2T2-2	Housing Type T2 / 2FT
GS2T2-3	Housing Type T2 / 3FT
GS2T2-4	Housing Type T2 / 4FT
GS2T2-6	Housing Type T2 / 6FT
GS2T2-9	Housing Type T2 / 9FT

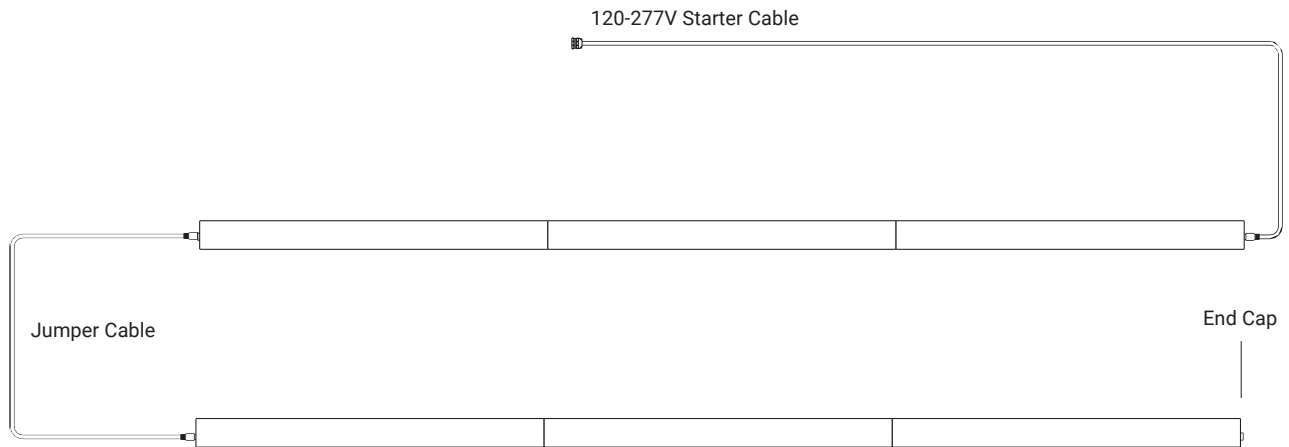

ELECTRICAL DETAILS

RGB/RGBW | 120-277V AC

BROWN	BLUE	GREEN	RED	BLACK
ACL +	ACN -	GROUND	DMX +	DMX -

